


DO NOT CUT LEADER - ONLY PRUNE DEAD OR DAMAGED BRANCHES

SECURE WOOD STAKES TO TREE WITH ARBORTIE (OR APPROVED EQUAL) AS PER MANUFACTURER'S INSTRUCTIONS

TWO NO.1 SPRUCE STAKES (38mm x 38mm) MINIMUM 2100mm LONG. INSTALL ON PREVAILING WIND SIDE (OR PARALLEL TO SIDEWALK WHERE APPLICABLE). TREE STAKES TO BE VERTICAL AND EXTEND INTO UNDISTURBED SOIL OUTSIDE OF THE ROOT BALL. TREE STAKES TO BE REMOVED AT THE CLOSE OF THE SECOND GROWING SEASON OR UPON EXPIRATION OF THE WARRANTY

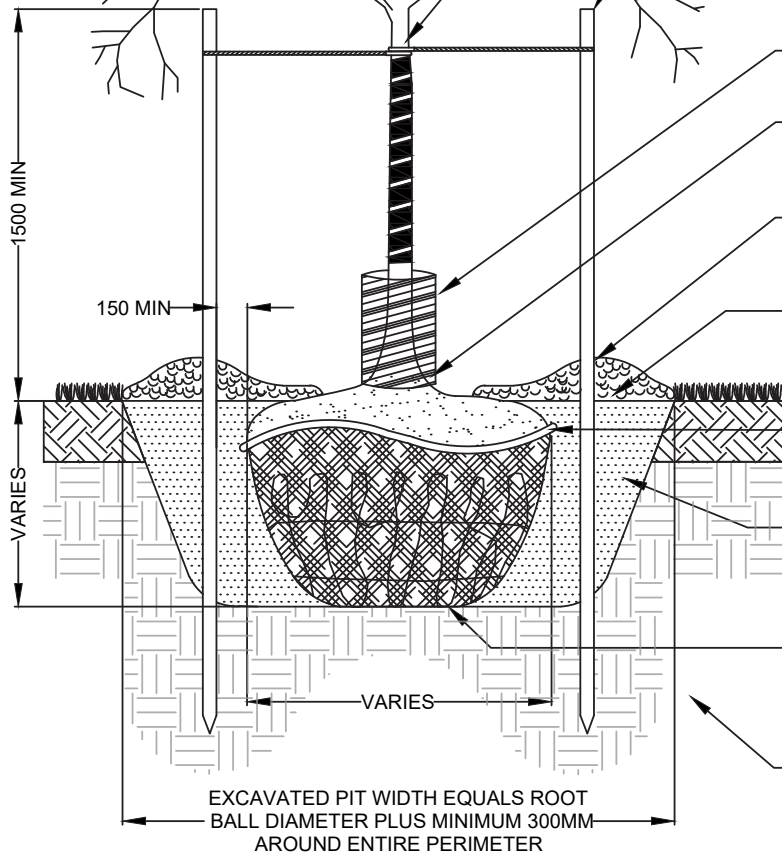

FLEXIBLE PLASTIC COLLAR 200mm DIAMETER, 400mm LONG

SET ROOT BALL IN HOLE ENSURING THAT THE TRUNK FLARE IS 50mm ABOVE EXISTING GRADE

100mm DEPTH SHREDDED CEDAR BARK MULCH OR AS SPECIFIED. KEEP MULCH 50MM AWAY FROM TRUNK FLARE.

BERM MULCH 100mm HIGH BY 200mm WIDE ABOVE THE ROOT BALL SURFACE ENCIRCLING THE PERIPHERY OF THE ROOT BALL

CUT AND REMOVE BURLAP, ROPE & WIRE FROM TOP 1/3 OF ROOTBALL ONCE TREE IS POSITIONED

BACKFILL WITH PLANTING SOIL AS SPECIFIED. HAND TAMP SOIL FIRMLY TO PREVENT SETTLEMENT AND TO ELIMINATE AIR POCKETS

BOTTOM OF ROOT BALL RESTS ON UNDISTURBED SUBGRADE OR RECOMPACTED SOIL. SCARIFY PIT PRIOR TO PLACING ROOTBALL

COMPACTED SUB-SOIL TO:
98% S.P.D - BOULEVARDS
95% S.P.D - OPEN SPACE

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE NOTED
2. ENSURE ALL TAGS, ROPES, STRAPS, TREE WRAPS AND CONTAINERS ARE REMOVED FROM TREE
3. REFER TO STANDARD #755 - 755.20 FOR PLANT MATERIAL SPECIFICATIONS
4. REFER TO STANDARD #753: TOPSOIL NOTES FOR PLANTING SOIL REQUIREMENTS
5. REFER TO TREE PIT STANDARD #514 FOR STREET TREE INSTALLATIONS

THE CORPORATION OF THE TOWN OF WHITBY

PLANNING & DEVELOPMENT DEPARTMENT

CHECKED	<i>[Signature]</i>
APPROVED	<i>[Signature]</i>
SCALE:	N.T.S

DECIDUOUS TREE PLANTING

DWG. DATE:	JANUARY 2021
REVISION No.:	002
REVISION DATE:	MAY, 2022
DWG No.	710