



SPADE CUT EDGE

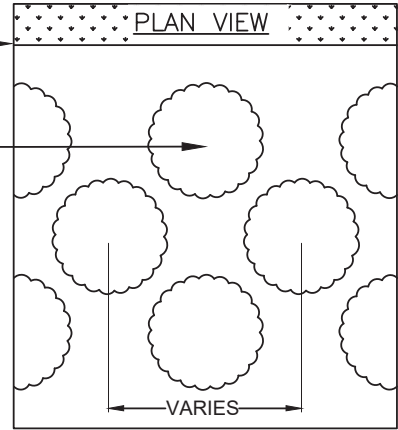

SHRUB LAYOUT TO BE STAGGERED IN A CONTINUOUS MULCHED BED, UNLESS OTHERWISE NOTED. REFER TO LANDSCAPE PLAN FOR SPECIES AND SPACING REQUIREMENTS.

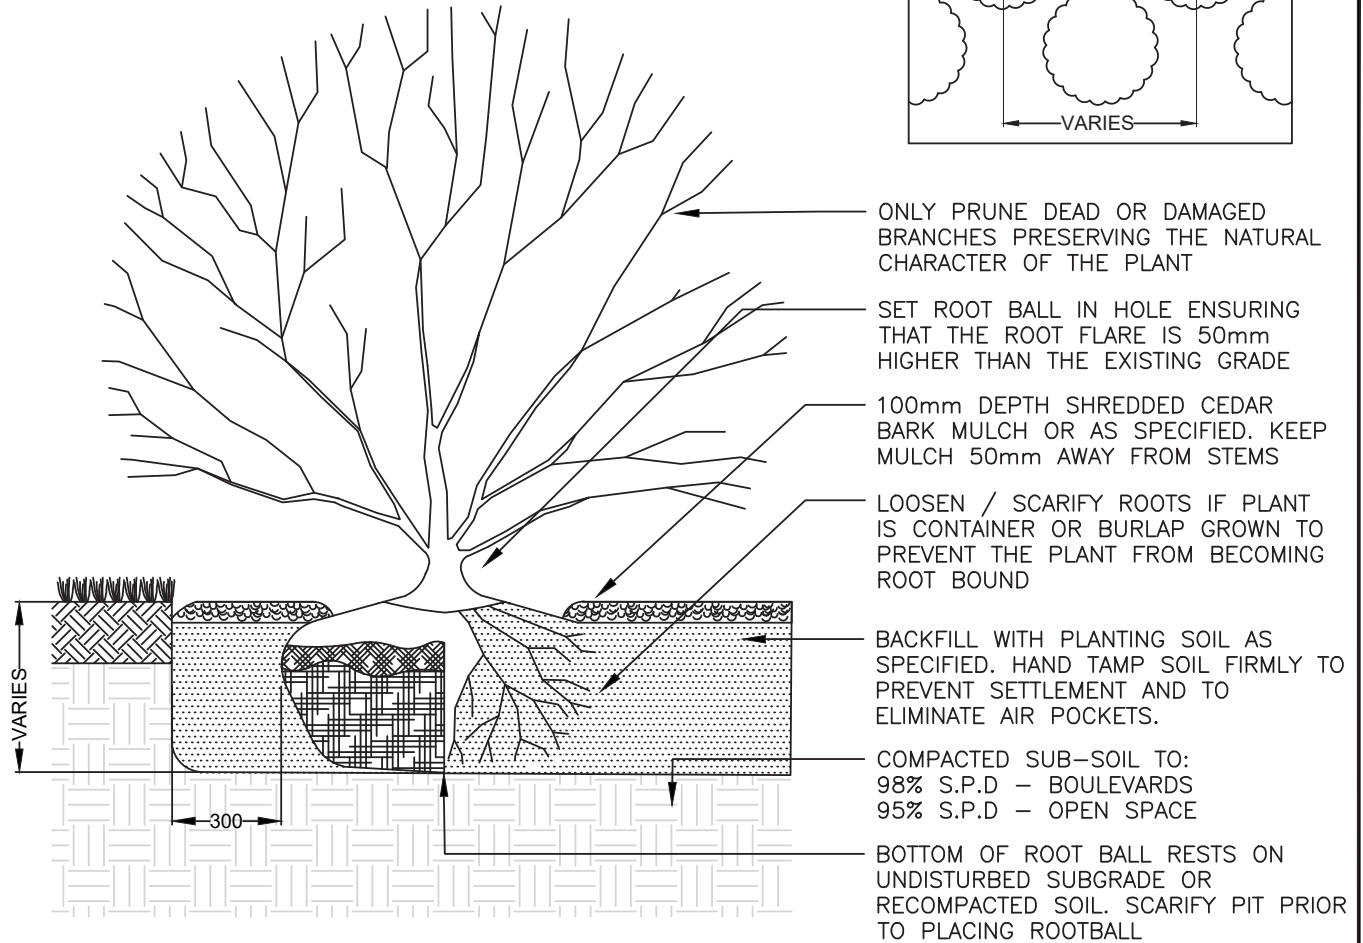

ONLY PRUNE DEAD OR DAMAGED BRANCHES PRESERVING THE NATURAL CHARACTER OF THE PLANT

SET ROOT BALL IN HOLE ENSURING THAT THE ROOT FLARE IS 50mm HIGHER THAN THE EXISTING GRADE

100mm DEPTH SHREDDED CEDAR BARK MULCH OR AS SPECIFIED. KEEP MULCH 50mm AWAY FROM STEMS

LOOSEN / SCARIFY ROOTS IF PLANT IS CONTAINER OR BURLAP GROWN TO PREVENT THE PLANT FROM BECOMING ROOT BOUND

BACKFILL WITH PLANTING SOIL AS SPECIFIED. HAND TAMP SOIL FIRMLY TO PREVENT SETTLEMENT AND TO ELIMINATE AIR POCKETS.

COMPACTED SUB-SOIL TO:  
98% S.P.D – BOULEVARDS  
95% S.P.D – OPEN SPACE

BOTTOM OF ROOT BALL RESTS ON UNDISTURBED SUBGRADE OR RECOMPACTED SOIL. SCARIFY PIT PRIOR TO PLACING ROOTBALL

INSTALLATION METHOD:

1. CONTAINER – CUT AND REMOVE ALL POTS, BURLAP, NAILS, STRINGS, ETC.
2. BARE ROOT – SPREAD ROOTS EVENLY OVER TAMPED MOUND OF PLANTING SOIL. WORK SOIL BETWEEN ROOTS
3. BURLAP – CUT AND REMOVE MATERIAL FROM TOP  $\frac{1}{3}$  OF ROOTBALL ONCE POSITIONED (IF APPLICABLE).

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE NOTED
2. PRUNE ANY VISIBLE GIRDLING ROOTS ONCE EXCESS SOIL IS REMOVED AND LOOSEN ANY ROOTS THAT ENIRCLE THE ROOT BALL. POT BOUND SHRUBS ARE NOT ACCEPTABLE. SLIT THE ROOT BALL VERTICALLY 3 TIMES EVENLY AROUND THE CIRCUMFERENCE OF THE ROOTBALL TO A 13mm DEPTH
3. ENSURE ALL TAGS, ROPES, STRAPS AND CONTAINERS ARE REMOVED FROM SHRUB
4. REFER TO STANDARD #755 – 755.20 FOR PLANT MATERIAL SPECIFICATIONS
5. REFER TO STANDARD #753: TOPSOIL NOTES FOR PLANTING SOIL REQUIREMENTS

THE CORPORATION OF THE TOWN OF WHITBY

PLANNING & DEVELOPMENT DEPARTMENT

CHECKED	<i>[Signature]</i>
APPROVED	<i>[Signature]</i>
SCALE:	N.T.S

# SHRUB PLANTING AND LAYOUT

DWG. DATE:	JANUARY 2021
REVISION No.:	002
REVISION DATE:	MAY, 2022
DWG No.	712