


PLAN VIEW

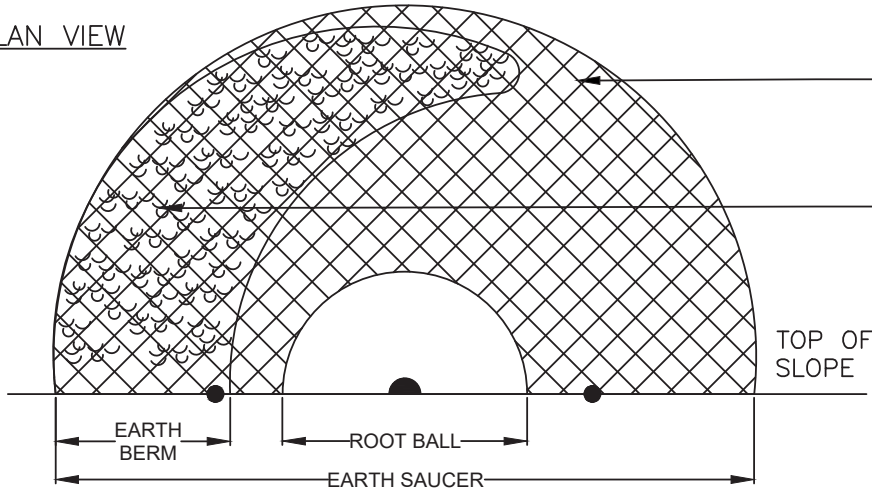


100mm DEPTH OF SHREDDED CEDAR BARK MULCH OR AS SPECIFIED. KEEP MULCH 50mm AWAY FROM TRUNK FLARE

150mm HIGH HORSESHOE EARTH BERM ENCIRCLES TRUNK ON LOW SIDE OF SLOPE

TOP OF SLOPE

CUT AND REMOVE BURLAP, ROPE & WIRE FROM TOP 1/3 OF ROOTBALL ONCE TREE IS POSITIONED

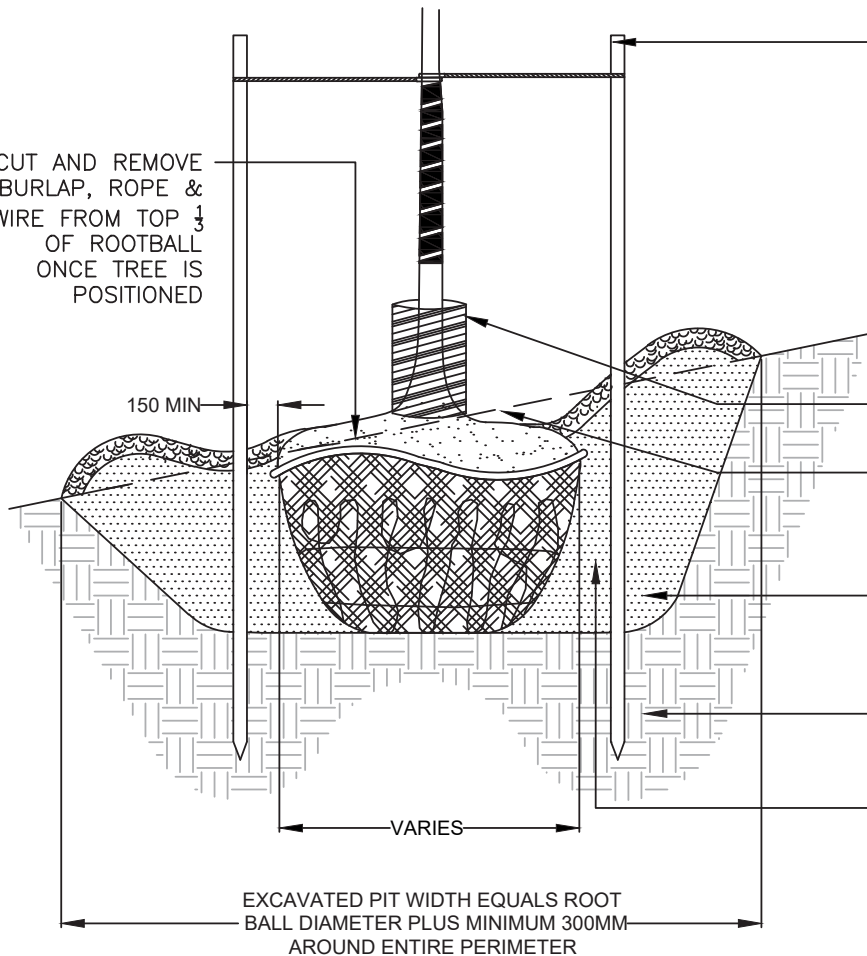

TWO NO.1 SPRUCE STAKES (38mm x 38mm) MINIMUM 2100mm LONG. INSTALL ON PREVAILING WIND SIDE, (OR PARALLEL TO SIDEWALK WHERE APPLICABLE). TREE STAKES TO BE VERTICAL AND EXTEND INTO UNDISTURBED SOIL OUTSIDE OF THE ROOT BALL. TREE STAKES TO BE REMOVED AT THE CLOSE OF THE SECOND GROWING SEASON OR UPON EXPIRATION OF THE PLANTING WARRANTY. SECURE TO TREE USING ARBORTIE OR APPROVED EQUAL

FLEXIBLE PLASTIC COLLAR 200mm DIAMETER, 400mm LONG

HIGH SIDE OF TRUNK FLARE AT OR JUST ABOVE GRADE. TRUNK FLARE SHOULD NOT EXTEND BELOW GRADE

BOTTOM OF ROOT BALL RESTS ON UNDISTURBED SUBGRADE OR RECOMPACTED SOIL. SCARIFY PIT PRIOR TO PLACING ROOTBALL

COMPACTED SUB-SOIL TO:
98% S.P.D – BOULEVARDS
95% S.P.D – OPEN SPACE

BACKFILL WITH PLANTING SOIL AS SPECIFIED. HAND TAMP SOIL TO PREVENT SETTLEMENT AND TO ELIMINATE AIR POCKETS.

NOTES:

1. ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE NOTED
2. ENSURE ALL TAGS, ROPES, STRAPS, TREE WRAPS AND CONTAINERS ARE REMOVED FROM TREE
3. REFER TO STANDARD #755 – 755.20 FOR PLANT MATERIAL SPECIFICATIONS
4. REFER TO STANDARD #753: TOPSOIL NOTES FOR PLANTING SOIL REQUIREMENTS
5. REFER TO TREE PIT STANDARD #514 FOR STREET TREE INSTALLATIONS

THE CORPORATION OF THE TOWN OF WHITBY

PLANNING & DEVELOPMENT DEPARTMENT

CHECKED	<i>[Signature]</i>
APPROVED	<i>[Signature]</i>
SCALE:	N.T.S

TREE PLANTING ON A SLOPE

DWG. DATE:	JANUARY 2021
REVISION No.:	002
REVISION DATE:	MAY, 2022
DWG No.	713